


SPI Module

Summary

The serial peripheral interface (SPI) module allows full-duplex, synchronous, serial communication between the microcontroller unit (MCU) and peripheral devices. Software can poll the SPI status flags or SPI operation can be interrupt driven.

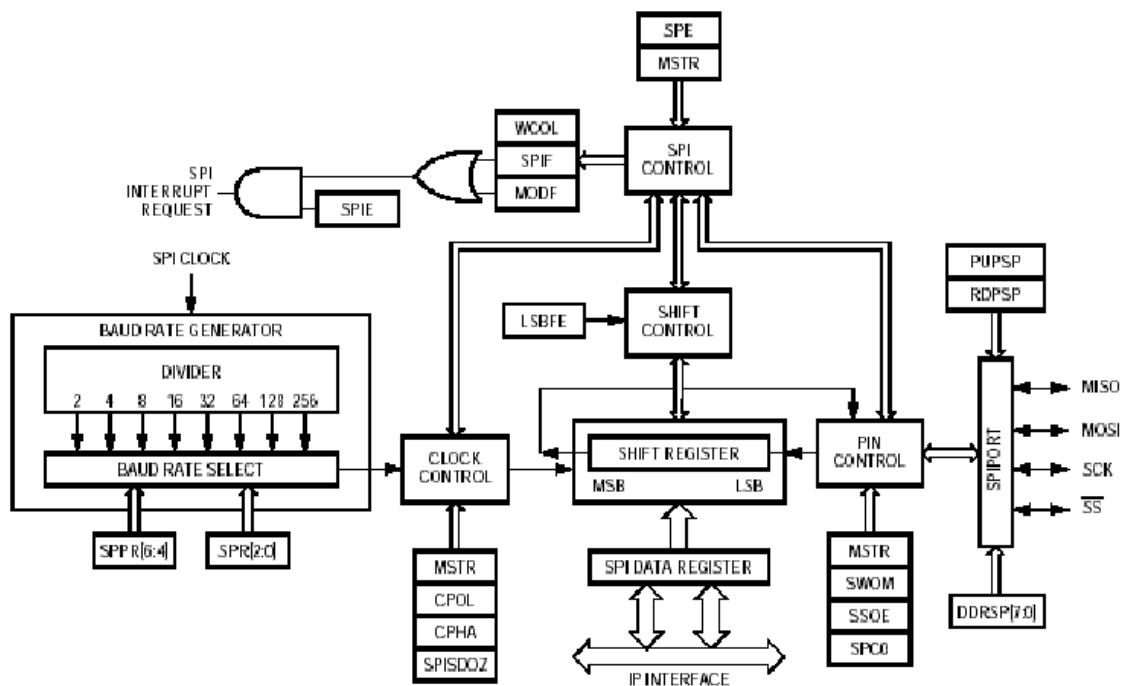

SPI Block Diagram

Features

- Master mode and slave mode
- Wired-OR mode
- Slave-select output
- Mode fault error flag with central processor unit (CPU) interrupt capability
- Serial clock with programmable polarity and phase
- Control of SPI operation during doze mode
- Reduced drive control for lower power consumption

Performance and Characteristics

- Frequency (WCS): 100 MHz
- Die Size: 0.029 mm²
- Process: 0.18μm (WCS, 1.62V, 120°)

Application Examples

- SPI flash
- SPI fingerprint sensor
- SPI master

Availability

- Q2, 2003

To obtain more information about the SPI or other C*Core™ products, please contact the C*Core Technology Co., Ltd. by phone: 0512-68091377, email: support@china-core.com or web: <http://www.china-core.com>.

C*Core™ is a trade mark of C*Core Co., Ltd.